


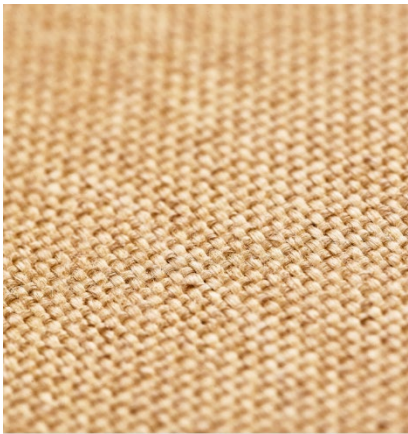

AG246050WTV

**24oz Vermiculite coated
Fiberglass Fabric**

Features

- High-temperature resistant fiberglass fabric rolled goods.
- Boasts the character for low bulk density, insulation, resistance to oxidation.
- Can be made to welding blanket or insulation jacket
- Good abrasion resistance.

Technical Specifications

- **Weave:** PLAIN
- **Yarn:** **WARP:** ET9 860 Tex; **WEFT:** ET9 860 Tex
- **Length:** 50 yds (45.72 m)
- **Width:** 60" (1.52 m)
- **Weight as per ASTM-D3776-2009:** 815 g / m²
- **Weight:** 24 oz/yd²
- **Thickness as per ASTM-D1777-1996:** 1 mm
- **Thread count per cm as per ASTM-D3775-2008:** **WARP:** 6; **WEFT:** 3.4
- **Coating:** Heat Treatment First & 20% Vermiculite Coating Brown
- **Tensile Strength as per ASTM-D5034-2001:** **WARP:** 1700 N/2.5cm; **WEFT:** 1150 N/2.5cm
- **Continuous Use Temperature:** 1832° F (1000° C)
- **Melt Point Temperature:** 3092° F (1700° C)
- **Certifications:** Europe BSEN 476 part 7, European Union CE, America FM/ANSI 4950